

## 2. Specification

### 2-1. GSM General Specification

|   | GSM850                     | EGSM 900                   | DCS1800                    | PCS1900                    | WCDMA 2100                                     | WCDMA 1900                                     | WCDMA 1700                                     | WCDMA 850                                      |
|---|----------------------------|----------------------------|----------------------------|----------------------------|--|--|--|--|
| Freq. Band [MHz]<br>Uplink/<br>Downlink | 824~849<br>869~894         | 880~915<br>925~960         | 1710~1785<br>1805~1880     | 1850~1910<br>1930~1990     | 1922~1977<br>2112~2167                         | 1852~1907<br>1932~1987                         | 1710~1755<br>2110~2155                         | 824~849<br>869~894                             |
| ARFCN range                             | 128~251                    | 0~124 &<br>975~1023        | 512~885                    | 512~810                    | UL:<br>9612~9888<br>DL:<br>10562~10838         | UL:<br>9262~9538<br>DL:<br>9662~9938           | UL:<br>1312~1513<br>DL:<br>1537~1738           | UL:<br>4132~4233<br>DL:<br>4357~4458           |
| Tx/Rx spacing                           | 45MHz                      | 45MHz                      | 95MHz                      | 80MHz                      | 190MHz   | 80MHz  | 400MHz   | 45MHz  |
| Mod. Bit rate/<br>Bit Period            | 270.833kbp<br>s<br>3.692us | 270.833kbp<br>s<br>3.692us | 270.833kbp<br>s<br>3.692us | 270.833kbp<br>s<br>3.692us | 3.84Mcps                                       | 3.84Mcps                                       | 3.84Mcps                                       | 3.84Mcps                                       |
| Time Slot Period/<br>Frame Period       | 576.9us<br>4.615ms         | 576.9us<br>4.615ms         | 576.9us<br>4.615ms         | 576.9us<br>4.615ms         | FrameLength:<br>10ms<br>Slotlength:<br>0.667ms | FrameLength:<br>10ms<br>Slotlength:<br>0.667ms | FrameLength:<br>10ms<br>Slotlength:<br>0.667ms | FrameLength:<br>10ms<br>Slotlength:<br>0.667ms |
| Modulation                              | 0.3GMSK                    | 0.3GMSK                    | 0.3GMSK                    | 0.3GMSK                    | QPSKHQPS<br>K                                  | QPSKHQPS<br>K                                  | QPSKHQPS<br>K                                  | QPSKHQPS<br>K                                  |
| MS Power                                | 33dBm~5dB<br>m             | 33dBm~5dB<br>m             | 30dBm~0dB<br>m             | 30dBm~0dB<br>m             | 24dBm~<br>-50dBm                               | 24dBm~<br>-50dBm                               | 24dBm~<br>-50dBm                               | 24dBm~<br>-50dBm                               |
| Power Class                             | 5pcl ~<br>19pcl            | 5pcl ~ 19pcl               | 0pcl ~ 15pcl               | 0pcl ~ 15pcl               | 3(max+24dB<br>m)                               | 3(max+24dB<br>m)                               | 3(max+24dB<br>m)                               | 3(max+24dB<br>m)                               |
| Sensitivity                             | -102dBm                    | -102dBm                    | -100dBm                    | -100dBm                    | -106.7dBm                                      | -106.7dBm                                      | -106.7dBm                                      | -106.7dBm                                      |
| TDMA Mux                                | 8                          | 8                          | 8                          | 8                          | 8  | 8  | 8  | 8  |
| Cell Radius                             | 35Km                       | 35Km                       | 2Km                        | 2Km                        | 2Km  | 2Km  | 2Km  | 2Km  |

## 2-2. GSM Tx Power Class

| TX Power control level | GSM850   | TX Power control level | EGSM900  | TX Power control level | DCS1800  | TX Power control level | PCS1900  |
|------------------------|----------|------------------------|----------|------------------------|----------|------------------------|----------|
| 5                      | 33±2 dBm | 5                      | 33±2 dBm | 0                      | 30±3 dBm | 0                      | 30±3 dBm |
| 6                      | 31±2 dBm | 6                      | 31±2 dBm | 1                      | 28±3 dBm | 1                      | 28±3 dBm |
| 7                      | 29±2 dBm | 7                      | 29±2 dBm | 2                      | 26±3 dBm | 2                      | 26±3 dBm |
| 8                      | 27±2 dBm | 8                      | 27±2 dBm | 3                      | 24±3 dBm | 3                      | 24±3 dBm |
| 9                      | 25±2 dBm | 9                      | 25±2 dBm | 4                      | 22±3 dBm | 4                      | 22±3 dBm |
| 10                     | 23±2 dBm | 10                     | 23±2 dBm | 5                      | 20±3 dBm | 5                      | 20±3 dBm |
| 11                     | 21±2 dBm | 11                     | 21±2 dBm | 6                      | 18±3 dBm | 6                      | 18±3 dBm |
| 12                     | 19±2 dBm | 12                     | 19±2 dBm | 7                      | 16±3 dBm | 7                      | 16±3 dBm |
| 13                     | 17±2 dBm | 13                     | 17±2 dBm | 8                      | 14±3 dBm | 8                      | 14±3 dBm |
| 14                     | 15±2 dBm | 14                     | 15±2 dBm | 9                      | 12±4 dBm | 9                      | 12±4 dBm |
| 15                     | 13±2 dBm | 15                     | 13±2 dBm | 10                     | 10±4 dBm | 10                     | 10±4 dBm |
| 16                     | 11±3 dBm | 16                     | 11±3 dBm | 11                     | 8±4 dBm  | 11                     | 8±4 dBm  |
| 17                     | 9±3dBm   | 17                     | 9±3dBm   | 12                     | 6±4 dBm  | 12                     | 6±4 dBm  |
| 18                     | 7±3 dBm  | 18                     | 7±3 dBm  | 13                     | 4±4 dBm  | 13                     | 4±4 dBm  |
| 19                     | 5±3 dBm  | 19                     | 5±3 dBm  | 14                     | 2±5 dBm  | 14                     | 2±5 dBm  |
|                        |          |                        |          | 15                     | 0±5 dBm  | 15                     | 0±5 dBm  |

### 3. Operation Instruction and Installation

---

#### Main Function

- Android OS: IceCreamSandwich
- 5MP AF with LED Flash
- 10.1 WXGA TFT Full Touch (C-Type)
- A-GPS / BT v4.0 USB v2.0 / WiFi (802.11 a/b/g/n) 2.4+5GHz
- Recording 720p / Playback 1080p
- Sensors: Accelation, Magnetic, Gyro, Light
- Additional :
  - 1.4GHz Quad Core CPU
  - Application store / Voice & Motion UI
  - Multi-touch, Multi-task manager

لینک کانال:  
@schimatics


## 6. Level 6 Repair

### 6-1. S/W installation

#### 6-1-1. Required items in order to install S/W


- Installation program: Downloader Program (**Odin3 v1.85.exe**)
- GT-N8000 Tablet PC
- Data Link Cable (GH39-01440H)
- Mobile device specific S/W: Binary files

#### ※ Settings

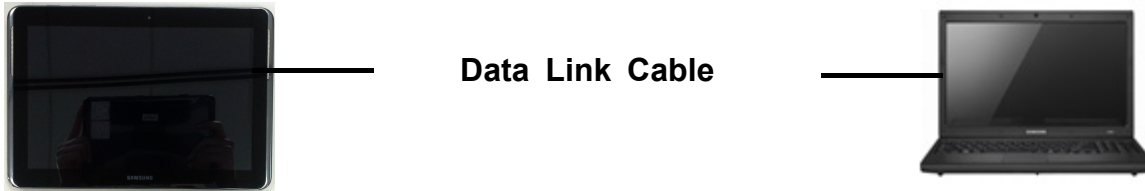


### 6-1-2. S/W Installation Program (Downloader program)

- Open up the S/W Installation Program by executing the "Odin3 v1.85.exe"

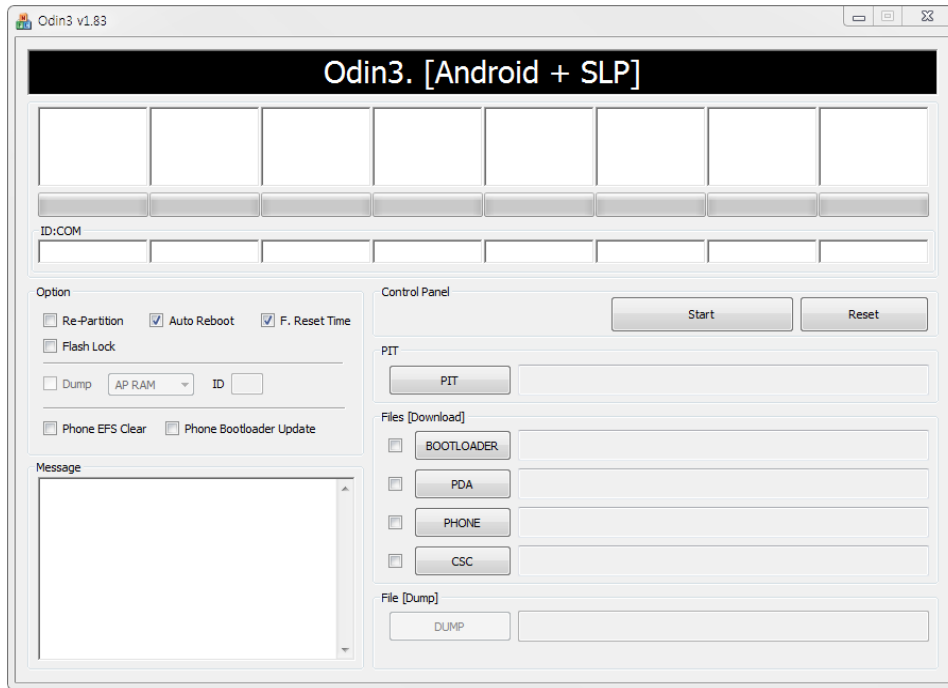


1. Enable the check mark by click on the following options,
  - Check Re-Partition, Auto Reboot, and F. Reset Time
  - Check PIT
  - Check PDA & Modem & CSC Files

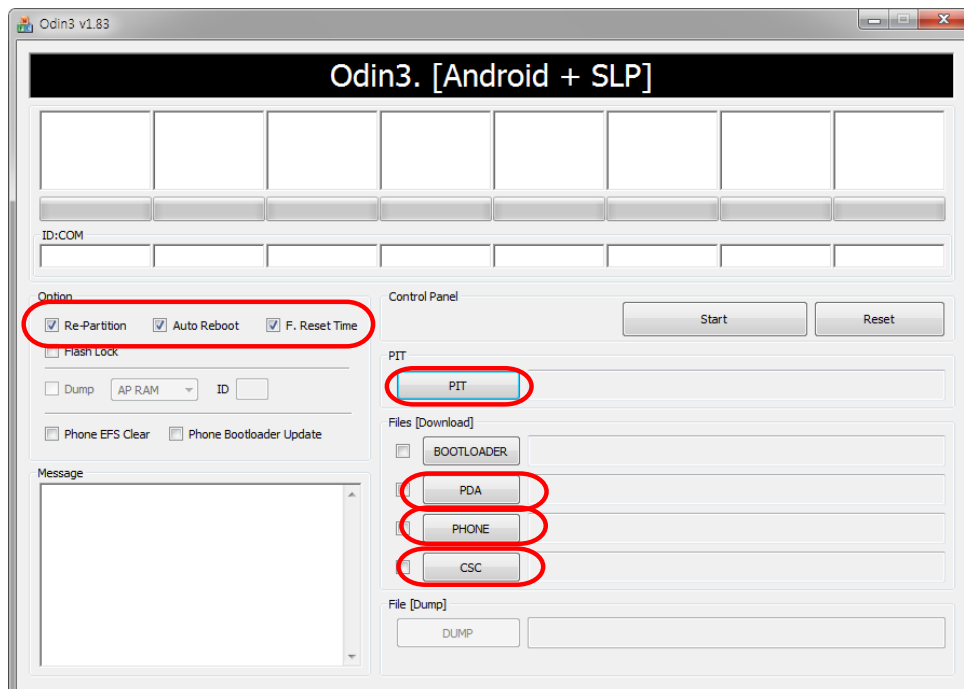


## 2. Enter into Download Mode

- Press down on Volume Down button and power key at same time for 10 seconds

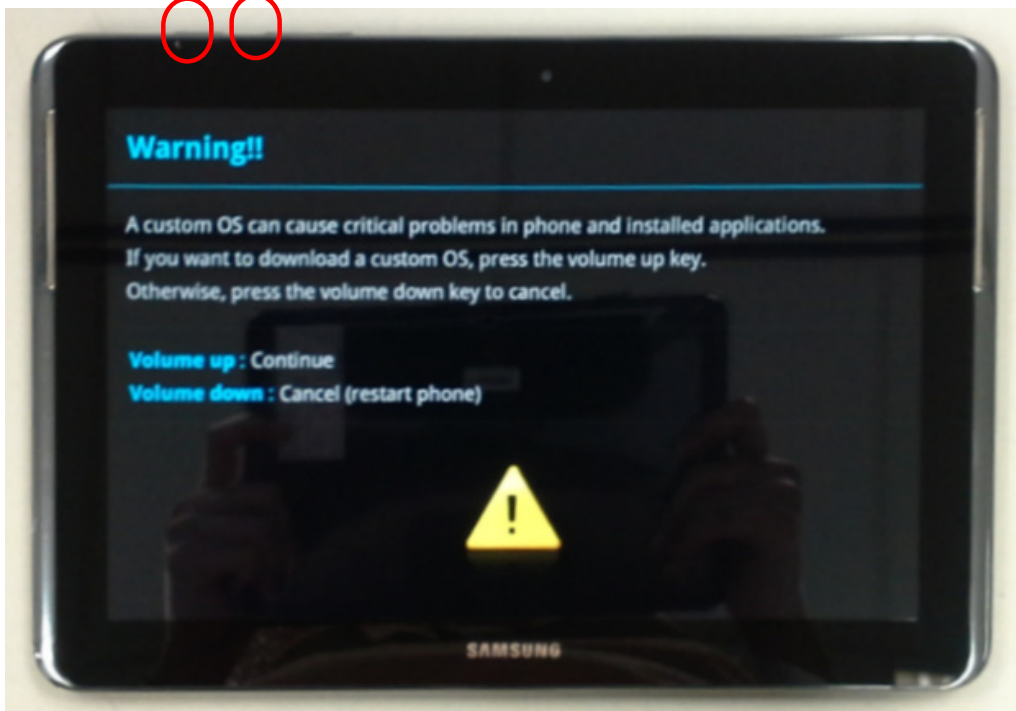


- Press down on Volume Up button to enter device into download mode

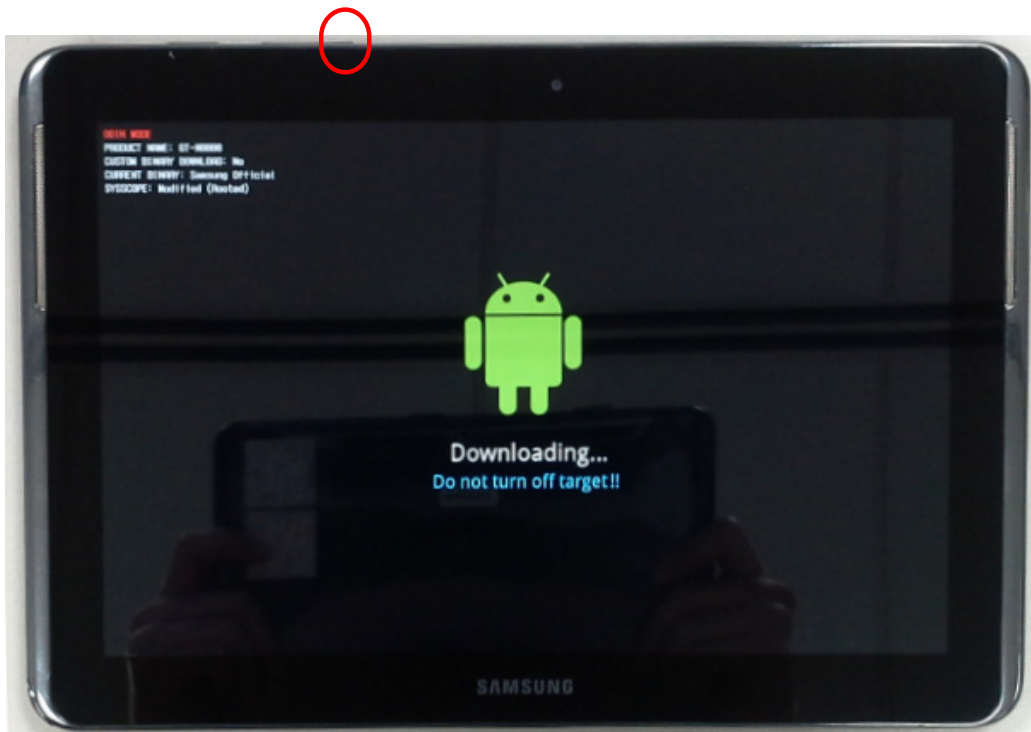


3. Connect the device to PC via Data Cable.

Make sure that the one of communication port [ID:COM] box is highlighted in yellow. The device is now connected with the PC and ready to download the binary file into the device.

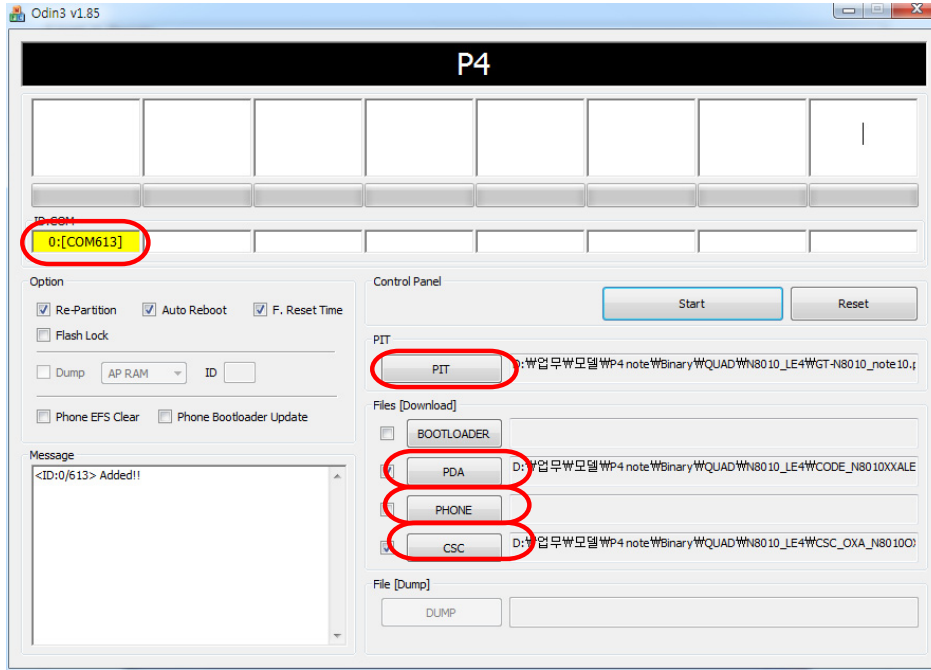

4. Start downloading binary file into the device by clicking Start Button on the screen. the green colored "PASS!" sign will appear on the upper-left box if the binary file has been successfully downloaded into the device.

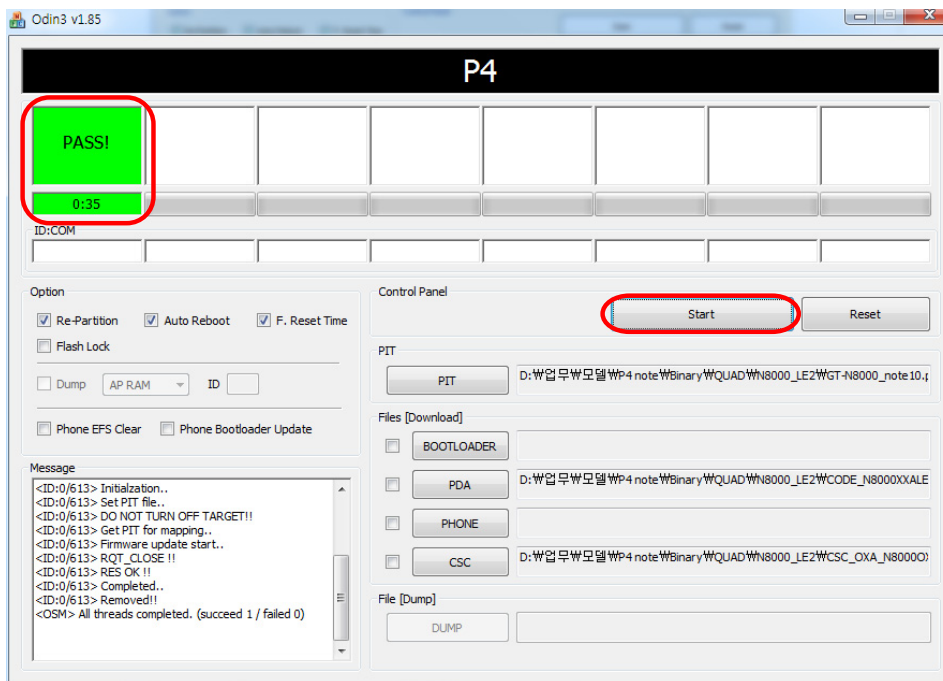

5. Disconnect the device from the Data cable.
  
6. Once the device boots up, you can check the version of the binary file or name by pressing the following code in sequence;  
**\*#1234#**

You can perform full reset by pressing the following code in sequence;

**\*#87976633#**



## 9. Reference Abbreviate

---

### Reference Abbreviate

- AAC: AdvancedAudioCoding.
- AVC: AdvancedVideoCoding.
- BER: BitErrorRate
- BPSK: BinaryPhaseShiftKeying
- CA: ConditionalAccess
- CDM: CodeDivisionMultiplexing
- C/I: CarriertoInterference
- DMB: DigitalMultimediaBroadcasting
- E: EuropeanStandard
- ES: ElementaryStream
- ETSI: EuropeanTelecommunicationsStandardsInstitute
- MPEG: MovingPictureExpertsGroup
- PN: Pseudo-randomNoise
- PS: PilotSymbol
- QPSK: QuadraturePhaseShiftKeying
- RS: Reed-Solomon
- SI: ServiceInformation
- TDM: TimeDivisionMultiplexing
- TS: TransportStream

## 1. Safety Precautions

---

### 1-1. Repair Precaution

Before attempting any repair or detailed tuning, shield the device from RF noise or static electricity discharges.

Use only demagnetized tools that are specifically designed for small electronic repairs, as most electronic parts are sensitive to electromagnetic forces.

Use only high quality screwdrivers when servicing products. Low quality screwdrivers can easily damage the heads of screws.

Use only conductor wire of the properly gauge and insulation for low resistance, because of the low margin of error of most testing equipment.

We recommend 22-gauge twisted copper wire.

Hand-soldering is not recommended, because printed circuit boards (PCBs) can be easily damaged, even with relatively low heat. Never use a soldering iron with a power rating of more than 100 watts and use only lead-free solder with a melting point below 250°C (482°F).

Prior to disassembling the battery charger for repair, ensure that the AC power is disconnected. Always use the replacement parts that are registered in the SEC system. Third-party replacement parts may not function properly.

## 1-2. ESD(Electrostatically Sensitive Devices) Precaution

Many semiconductors and ESDs in electronic devices are particularly sensitive to static discharge and can be easily damaged by it. We recommend protecting these components with conductive anti-static bags when you store or transport them.

Always use an anti-static strap or wristband and remove electrostatic buildup or dissipate static electricity from your body before repairing ESDs.

Ensure that soldering irons have AC adapter with ground wires and that the ground wires are properly connected.

Use only desoldering tools with plastic tips to prevent static discharge.

Properly shield the work environment from accidental electrostatic discharge before opening packages containing ESDs.

The potential for static electricity discharge may be increased in low humidity environments, such as air-conditioned rooms. Increase the airflow to the working area to decrease the chance of accidental static electricity discharges.